

Alco


PVC Shrouds

FEATURES:

- Assist in providing additional protection to cable glands to improve IP rating
- Act as an extra guard against corrosion and the weather
- Suitable for use with all types of polymeric jacketed cable
- Compatible with all Alco cable gland ranges

TECHNICAL DATA:

| | |
|---------------------------|-----------------------------|
| Tensile Strength | 12MPa |
| Relative Density | 1.3g/cm ³ |
| Shore A Hardness | 73 ± 2 units |
| Extensibility | 3.7 x |
| Volume Resistivity | 2 x 10 ¹³ ohm cm |
| Temperature Range | 0°C to +75°C |

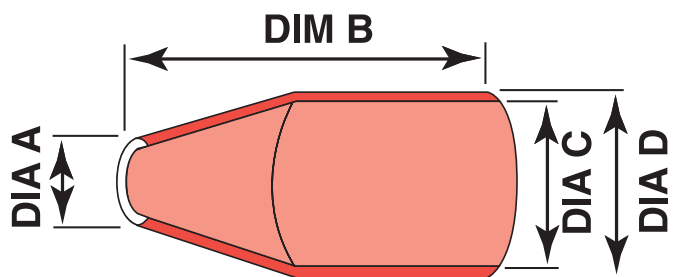

SPECIFICATIONS:

| PART NUMBER | CABLE DIAMETER (DIA A) | OVERALL LENGTH (DIM B) | INSIDE DIAMETER (DIA C) | OUTSIDE DIAMETER (DIA D) | BOX QTY | COLOUR* |
|-------------|------------------------|------------------------|-------------------------|--------------------------|---------|---------|
| ALCSG1 | 6 | 69 | 25 | 27 | 50 | Orange |
| ALCSG2 | 10 | 76 | 29 | 32 | 40 | Orange |
| ALCSG2L | 12 | 87 | 35 | 38 | 30 | Orange |
| ALCSG3 | 14 | 96 | 40 | 43 | 20 | Orange |
| ALCSG4 | 20 | 108 | 51 | 54 | 20 | Orange |
| ALCSG5 | 29 | 115 | 62 | 65 | 5 | Orange |
| ALCSG6 | 38 | 126 | 75 | 78 | 5 | Orange |

*For black shrouds add B to part number, e.g. ALCSG2B. # All dimensions in mm unless otherwise specified.

Wattmaster

THE BRAND ELECTRICIANS RELY ON

T: 1300 300 747 F: 1300 300 074

www.wattmaster.com.au