


# ELECTRA CABLES

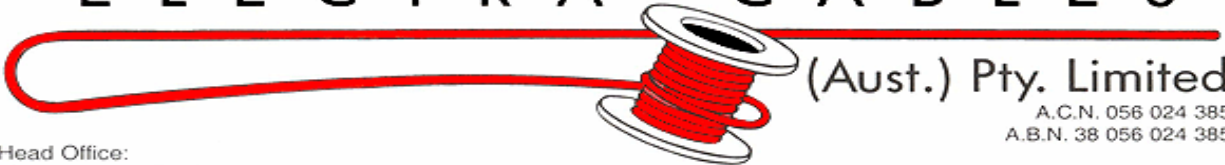

(Aust.) Pty. Limited

A.C.N. 056 024 385  
A.B.N. 38 056 024 385

Head Office:  
21-23 Pavese Street  
Guildford, N.S.W. 2161  
P.O. Box 2084  
Smithfield, N.S.W. 2164  
Phone: (02) 9632 2266  
Fax: (02) 9632 8822

Victoria Branch:  
22-24 Kilkenny Court  
Dandenong South, Vic. 3175  
Phone: (03) 9769 2811  
Fax: (03) 9769 2425

Queensland Branch:  
Unit 2-3, 52 Fulcrum Street  
Richlands, Qld. 4077  
Phone: (07) 3375 6277  
Fax: (07) 3375 6299

## Marine Cable

**Application:** For use in marine situations where tinned copper is used because it is resistant to corrosion and therefore outlasts plain copper cables.

**Conductor:** Tinned annealed copper wire (AS1125)

**Insulation:** PVC V75

**Sheath:** PVC V75

**Voltage:** 100V DC or 32V AC

**Standard:** AS/NZS3808

**Pack Length:** 50m, 100m

**CAUTION**  
Extra Low Voltage – Should NOT be  
connected to mains power supply

### Typical Features:

Electra Cables Part No.	Nom. area mm <sup>2</sup>	Nom. O/D. mm	Stranding No./mm	Insulation Thickness mm	Core Colour	Sheath Colour	Amp Rating	Maximum Resistance at 20°C Ω/Km
<b>Single Core</b>								
MAR4	1.85	3.2	26/0.3	0.6	-	Red, Black	15	10.4
MAR6	4.65	4.3	37/0.4	0.8	-	Red, Black	50	4.1
<b>Battery &amp; Starter</b>								
MAR2BS	33	12.0	460/0.3	1.7	-	Red, Black	120	0.58
MAR3BS	23	10.5	325/0.3	1.6	-	Red, Black	100	0.81
MAR8BS	7	5.6	100/0.3	0.9	-	Red, Black	45	2.36
<b>Twin Sheath</b>								
MAR321	1.07	6.4x3.6	2x16/0.3	0.6	Red, Black	White	10	16.5
MAR421	1.85	8.2x4.6	2x26/0.3	0.6	Red, Black	White	15	10.1
MAR621	4.65	10x6.0	2x37/0.4	0.8	Red, Black	White	50	4
<b>Figure 80.6</b>								
MAR32	1.13	2.7x5.5	2x16/0.3	0.6	-	Red, Black	6	16.5

**Note:** Other types or other lengths of the above cables can be manufactured according to customers' specifications.