


DAWN 16W

DN16WOVL-TRI

SAP CODE: 2001706

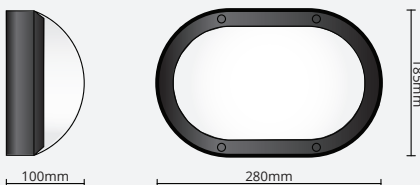


16W, Weather and impact resistant, Selectable colour temperature, LED Bunker

An oval robust bunker light constructed with aluminium body and opal diffuser providing decorative solution for both residential and commercial applications.

Accessories
GRILLE TRIM
DNOVL-GR280



Photometric Diagram

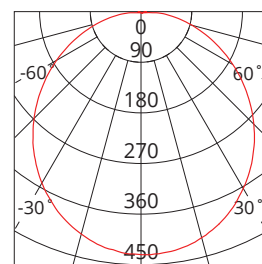

Unit: cd
— C0/180 120.0deg
— C90/270 120.0deg

KEY INFORMATION

Lumen Output	1320 / 1500 / 1400lm
Input Power	16W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	*Phase-Cut Dimming
Trim Colour	BLACK
Warranty	5yr
IP Rating	IP66
IK Rating	IK10
IC Rating	N/A
Rebate Scheme Approvals	N/A

PHOTOMETRIC

Efficacy	83 / 94 / 87lm/W
LED	SMD
CCT	3000 / 4000 / 5000K
CRI	>80
Beam Angle	120°

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	40VDC
Power Factor	>0.9
LED Input Current (nominal)	400mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Mounting Screws
Connection Type	Terminal Block
Total Weight	0.95kg
Dimensions	280 x 185 x 100mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 1

*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use the Haneco DUO-350W dimmer.