


HABITAT

HABITAT-FL-TRI

SAP CODE: 2002012

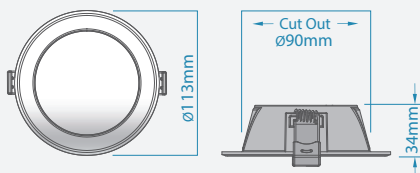

10W dimmable, switchable colour temperature, flush diffuser, low profile downlight with remote driver

White trimmed low profile LED downlight with flush opal diffuser and remote driver.



Photometric Diagram



KEY INFORMATION

Lumen Output	1040 / 1120 / 1070lm
Input Power	10W
Hole Cutout Size	Ø90mm
Install	RECESSED
Dimming Options	*Phase-Cut Dimming
Fitting Colour	WHITE
Warranty	4yr
IP Rating	IP54
IK Rating	N/A
IC Rating	IC-4
Rebate Scheme Approvals	N/A

PHOTOMETRIC

Efficacy	104 / 112 / 107lm/W
LED	SMD
CCT	3000 / 4200 / 5700K
CRI	>80
Beam Angle	100°

ELECTRICAL

Driver	Remote
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	67V DC
Power Factor	>0.9
LED Input Current (nominal)	135mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Polycarbonate
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Rubberised Clip
Connection Type	1m Flex & Plug
Total Weight	0.2kg
Dimensions	Ø113 x 35mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 2

*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use Haneco or KASTA dimmers.