

Litelux Colour Select LED Downlight Gen3

DLP53/4/65FWG3

- Remote driver suitable for low ceilings or limited height in ceiling cavity
- IC-4 compliant which permits use when covered
- One box solution with 3-in-1 colour temperature (3000K/4000K/6500K) with dip switch located on driver




COLOUR SELECT

Performance

System Power	8W, 8W, 8W
Exit Lumen	800lm, 810lm, 810lm
Efficacy	103lm/W, 103lm/W, 103lm/W
Tuneable CCT	N/AK to N/AK
CCT	3000K, 6500K, 4000K
CRI	80
Operating Temperature	0°C to 40°C
MacAdam Steps	6SDCM
Ingress Protection Rating	IP65
Beam Distribution	Symmetric
Beam Angle	100°
Warranty	3 Years
Lifetime	36,000hrs (L70/B50)

Line Drawings

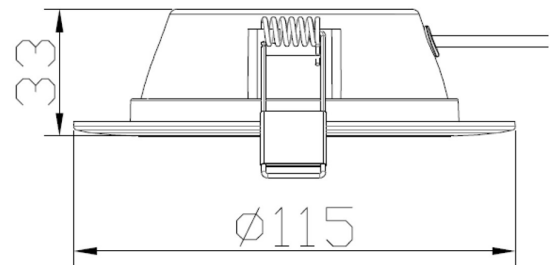

Product Images



Physical

Dimensions	Ø115 x H33mm
Cutout Diameter	90mm
Diffuser	Polystyrene
Luminaire Colour	White
Weight	0.26kg
Luminaire Material	Aluminium
Driver Location	Remote
Heatsink	Aluminium
Finish	White
Installation	Recessed

Electrical

Dimming	Phase
Voltage	240V
Inrush Current	1A
Inrush Current Duration	132µs
Line Current	0.03A
Electrical Rating	Class II

