



WAVE S9064TC - 7W

Dimmable IP44 LED downlight with selectable CCT

Application


Ideal for any residential interior space

Design Specifications

- Selectable CCT 3000K/4000K/5700K
- Poly covered aluminium body, double insulation, IC - 4 rated
- Opal polycarbonate diffuser
- Integral constant current trailing edge dimmable LED driver, with flex and plug
- High efficiency LED optics
- Deco ring options - Satin Nickel S9064SN/RING, Black S9064BK/RING

Performance

- Dimmable - **YES**
- Dimmer Type - **Trailing edge**

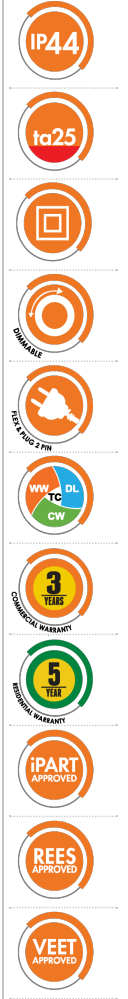

Technical Specification


Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)
	S9064TC WH	240	7	750/850/800	3000/4000/5700	90
Dimmable	CRI	Body Colour	Cut Out (mm)	Diameter (mm)	Dim (mm)	iPART
YES	80	WHITE	72	95	58(H)	YES
REES			VEET			
YES			YES			

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".




Dimensions

S9064 TC

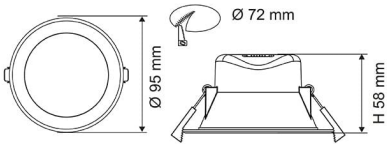

Photometric Data

Unit: cd C0/C180 — C90/C270 —



THE SFI SYSTEM ELIMINATES LED FLICKERING.

**SIMPLY
MATCH THE
ECO GEM SFI
DOWNLIGHT
WITH THIS
SDD400SFI
DIMMER.**



**DIM with
FLICKER
CONTROL**

For related
products
please
scan me

