


# Type M

## Straight fitting

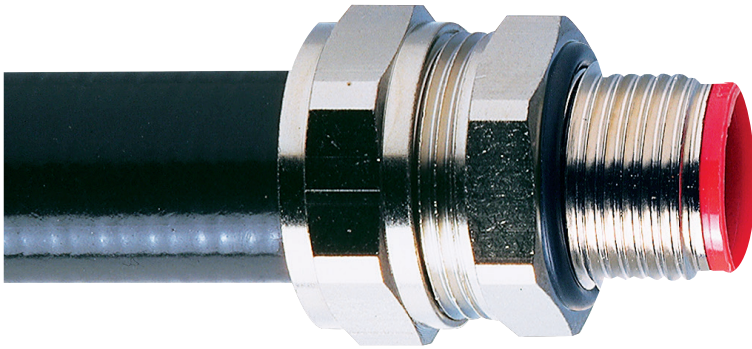

Straight fitting with fixed external male thread. For insertion into threaded entries or knockouts using a locknut to secure.

**Certifications / Standards:**



**Features & benefits:**

- Straight fitting - Fixed external male thread
- High impact resistance
- Very high UV resistance

**Applications:**

- Designed to help maintain system integrity
- For insertion into threaded entries or knockouts using a locknut to secure (Locknuts supplied as part of the applications)

**Suitable for conduit type :**

- Type SPL, SPL-EF, SPLHC & SPUL

**Material:**

- Nickel Plated Brass
- Co-Polyester seal
- Nylon inserts

**UV Resistance:**

- Very high

**Environmental ratings**

**Temperature range:**

- Static applications: -65°C to +150°C (-85°F to +302°F)
- Moving applications: -45°C to +150°C (-49°F to +302°F)

**Ingress protection:**

- IP66
- IP67
- IP68 (10 bar 30 mins)
- IP69

**Fire performance:**

- Self extinguishing
- Halogen free


**Chemical resistance guide:**

- See publication TDS000081

**Conforms to:**

- CE marked to Low Voltage Directive 2014/35/EU
- BSI Kitemark KM35161 to BS EN 61386
- UL514B file number E60625
- AS/NZS 2053.1:2001
- AS/NZS 2053.8:1995

## Type M – Product selection

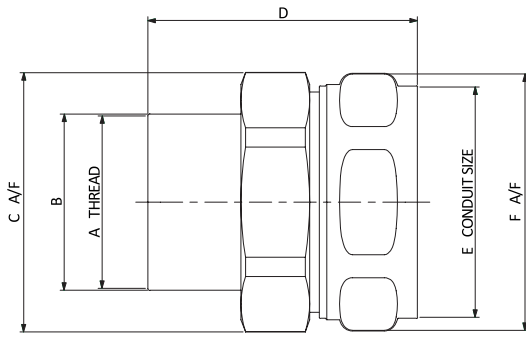

Part No.	Nominal conduit size (mm)	Nominal conduit size (in)	Metric thread
SPL10/M12/M	10	1/4"	M12
SPL10/M16/M	10	1/4"	M16
SPL12/M16/M	12	5/16"	M16
SPL16/M16/M	16	3/8"	M16
SPL16/M20/M	16	3/8"	M20
SPL20/M20/M	20	1/2"	M20
SPL25/M25/M	25	3/4"	M25
SPL32/M32/M	32	1"	M32
SPL40/M40/M	40	1 1/4"	M40
SPL50/M50/M	50	1 1/2"	M50
SPL63/M63/M	63	2"	M63

Part No.	Nominal conduit size (mm)	Nominal conduit size (in)	PG thread
SPL10/PG7/M	10	1/4"	PG7
SPL12/PG9/M	12	5/16"	PG9
SPL16/PG11/M	16	3/8"	PG11
SPL16/PG13/M	16	3/8"	PG13,5
SPL20/PG16/M	20	1/2"	PG16
SPL25/PG21/M	25	3/4"	PG21
SPL32/PG29/M	32	1"	PG29
SPL40/PG36/M	40	1 1/4"	PG36
SPL50/PG42/M	50	1 1/2"	PG42
SPL63/PG48/M	63	2"	PG48

Part No.	Nominal conduit size (mm)	Nominal conduit size (in)	NPT thread
SPL16/038/M	16	3/8"	3/8"
SPL20/050/M	20	1/2"	1/2"
SPL25/075/M	25	3/4"	3/4"
SPL32/100/M	32	1"	1"
SPL40/125/M	40	1 1/4"	1 1/4"
SPL50/150/M	50	1 1/2"	1 1/2"
SPL63/200/M	63	2"	2"

ABB Ltd.  
 CMG House, Station Road  
 Coleshill, B46 1 HT, UK  
 Customer services:  
 lv.customerservice@gb.abb.com  
 Technical support:  
 cmg.conduitsystems@tnb.com  
**www.adaptaflex.com**

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilisation of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG.  
 Copyright© 2018 ABB  
 All rights reserved